




SPARK ARRESTORS — “SAU” SERIES

INDUSTRIAL GRADE

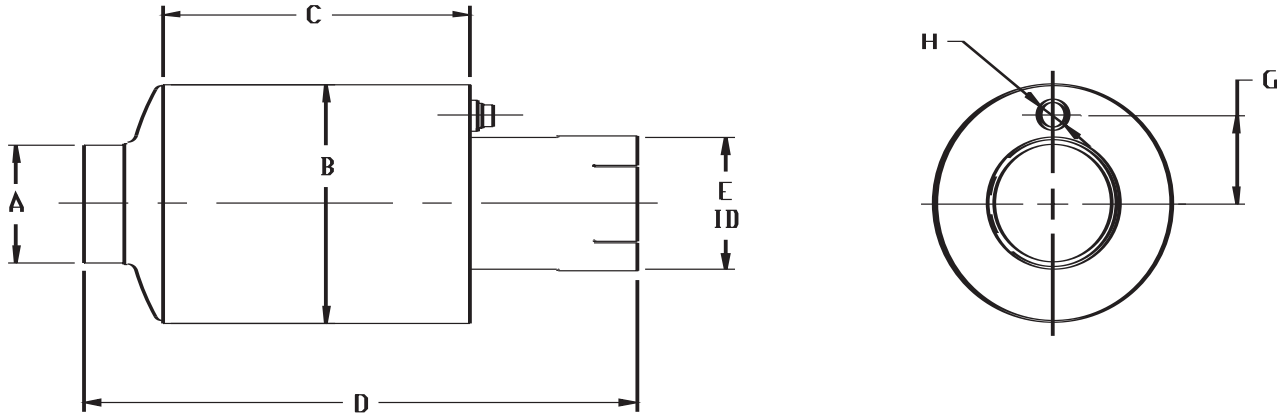

Standard Silencer Application

- Exhaust spark arrester
- Designed for mobile and stationary engines
- Recommended for hazardous environments

Standard Construction Features

- U.S. department of Agriculture (Forest Service) qualified
- Tested by U.S. Forest Service and rated virtually 100% efficient
- Aluminized and stainless steel construction
- Slotted ID inlet / Stub OD outlet
- Protective finish applied
- Can be mounted vertically or horizontally

Optional

- Complete line of accessories

DIMENSIONS IN INCHES/MILLIMETERS, WEIGHT IN POUNDS/KILOGRAMS

WITH MNPT/ STUB CONNECTION Part NUMBER	WITH SLOTTED/ STUB CONNECTION PART NUMBER	A inch / mm	B inch / mm	C inch / mm	D inch / mm	E inch / mm	J inch / mm	G inch / mm	H inch / mm	WEIGHT pounds / kg
SAU-15-980330	SAU-15-981071	1.5 / 38	6.0 / 152	3.8 / 97	10.38 / 264	1.5 / 38	3.52 / 89	1.9 / 48	3/8 / 9.5	5 / 2.3
SAU-02-980331	SAU-02-981072	2.0 / 51	6.0 / 152	5.1 / 130	10.72 / 272	2.0 / 51	5.62 / 143	2.0 / 51	3/8 / 9.5	6 / 2.7
SAU-25-980332	SAU-25-981073	2.5 / 64	6.6 / 168	6.2 / 157	15.47 / 393	2.5 / 64	6.12 / 155	2.3 / 58	3/8 / 9.5	8 / 3.6
SAU-03-980333	SAU-03-981074	3.0 / 76	7.0 / 178	7.6 / 193	18.00 / 457	3.0 / 76	7.38 / 187	2.5 / 64	3/8 / 9.5	10 / 4.5
SAU-35-980334	SAU-35-981075	3.5 / 89	7.0 / 178	9.0 / 229	20.52 / 521	3.5 / 89	8.62 / 219	2.6 / 66	1/2 / 13	12 / 5.4
SAU-04-980335	SAU-04-981076	4.0 / 102	8.0 / 203	10.6 / 269	22.31 / 567	4.0 / 102	9.12 / 232	3.0 / 76	1/2 / 13	15 / 6.8
SAU-05-980336	SAU-05-981077	5.0 / 127	9.0 / 229	11.8 / 300	24.87 / 632	5.0 / 127	10.18 / 259	3.5 / 89	1/2 / 13	21 / 9.5
SAU-06-980337	SAU-06-981078	6.0 / 152	10.0 / 254	13.3 / 338	26.72 / 679	6.0 / 153	10.24 / 260	4.0 / 102	1/2 / 13	25 / 11.3